


COLOR+WOOD

COLOR+WOOD LVT OFFERS A SUBTLE LINEAR PATTERN ON PLANK SIZES IN COLOR AND WOOD TONES. THIS UNIQUE STRIATION FEATURE FITS WELL IN CONTEMPORARY SPACES.

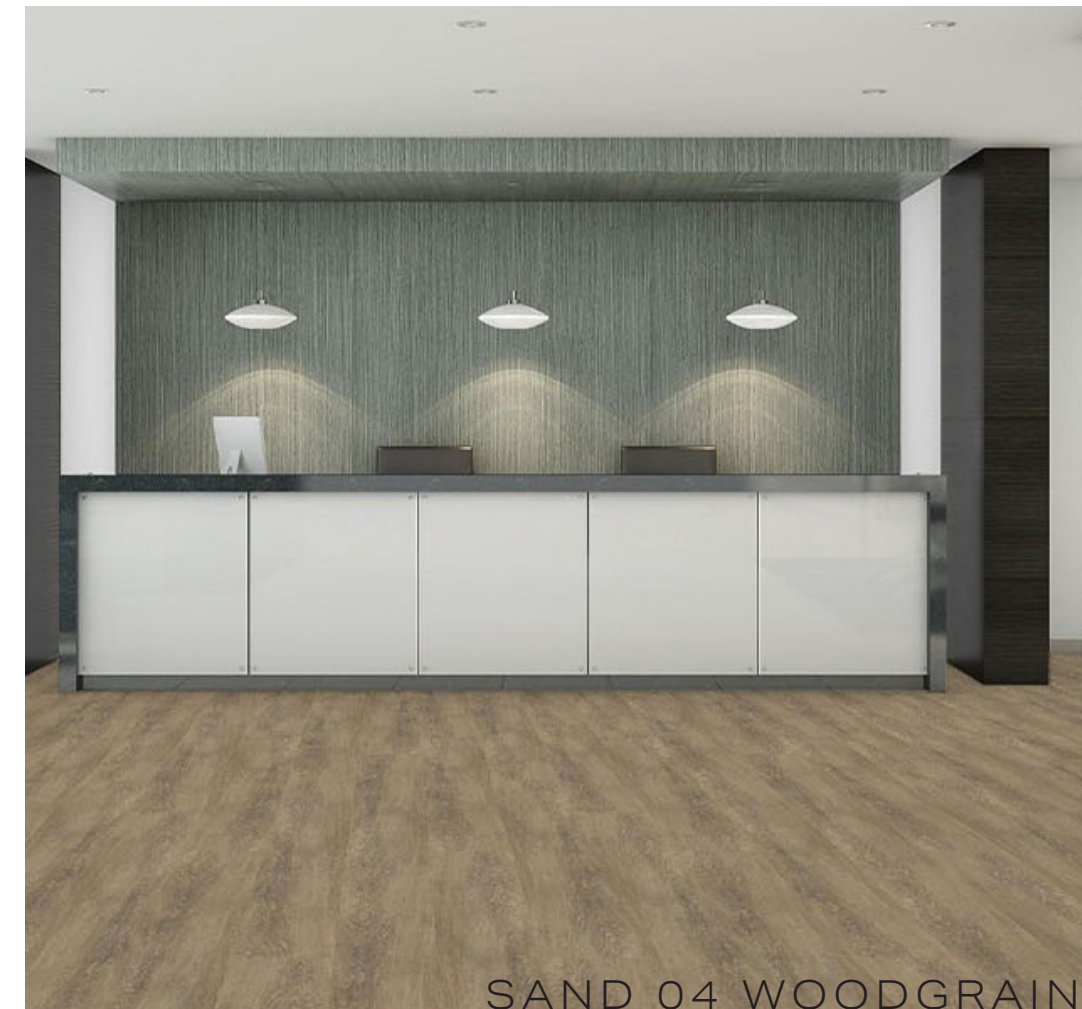

SAND 04 WOODGRAIN

creative
materials
corporation

COLOR+WOOD

LUXURY VINYL TILE

SIZES

7"x48"

WEAR LAYER

20 MIL

THICKNESS

2.5MM

LEAD TIME + LOCATION

1-2 WEEKS DOMESTIC INVENTORY | SOUTH KOREA

EDGE PROFILE

SQUARE

INSTALLATION

GLUE DOWN

ENVIRONMENTAL

- ENVIRONMENTAL PRODUCT DECLARATION (EPD) - 3RD PARTY CERTIFIED IN ACCORDANCE WITH ISO 14025, EN 15804, AND ISO 21930:2017
- FLOORSCORE® - CERTIFIED
- MR CREDIT: BUILDING PRODUCT DISCLOSURE AND OPTIMIZATION
 - ENVIRONMENTAL PRODUCT DECLARATIONS - OPTION 1
 - ENVIRONMENTAL PRODUCT DECLARATION - RFCI INDUSTRY AVERAGE EPD (50%)
 - EQ CREDIT: LOW EMITTING MATERIALS - OPTION 1
 - PRODUCT CATEGORY CALCULATIONS - FLOORSCORE CERTIFIED

STRIATION



CHARCOAL



GREY



GREIGE



TAUPE



BONE




BEIGE




YELLOW



GREEN

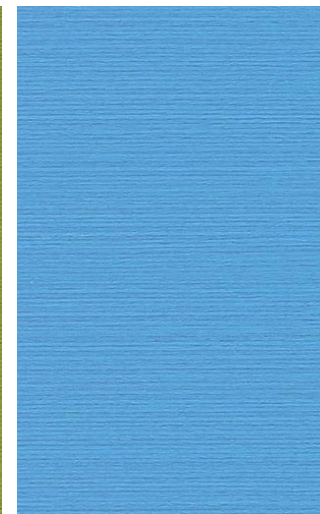

TEAL

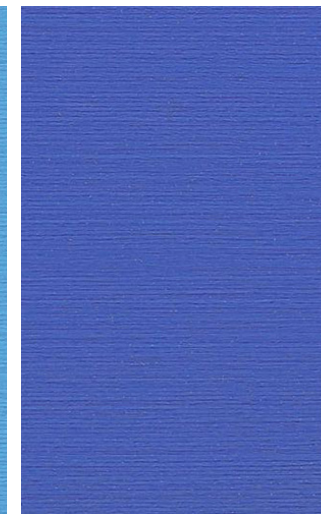

BLUE

AURORA BOREALIS

LUXURY VINYL TILE

WOODGRAIN



SPECIFICATION REFERENCE	TEST METHOD	TEST RESULT
STATIC LOAD	ASTM F970	PASSES (MODIFIED) *1000 PSI
HEAT RESISTANCE	ASTM F1514	PASSES
LIGHT RESISTANCE	ASTM F1515	PASSES
CHEMICAL RESISTANCE	ASTM F925	PASSES
SMOKE DENSITY	ASTM E662	PASSES
RADIANT PANEL	ASTM E648	PASSES, CLASS 1
CLASSIFICATION	ASTM F1700	CLASS III, TYPE B

**All technical data was supplied by the manufacturer and is being provided by CMC for informational purposes only. Exact test results should be requested from your CMC contact.