

# HARMONIOUS

HARMONIOUS LVT IS BRIGHT, COLORFUL, ABSTRACT DESIGNS THAT WILL MAKE YOUR DESIGN POP! WITH DIRECTIONAL PATTERN DIFFERENCES THESE TWO PLAY HARMONIOUSLY TOGETHER IN SPACES.



creative  
materials  
corporation

CROSSHATCH | SAND, MAROON, RED, ORANGE, PURPLE, TEAL, YELLOW




CROSSHATCH | OFF-WHITE, YELLOW, ORANGE, TEAL



# HARMONIOUS

## LUXURY VINYL TILE

### SIZES

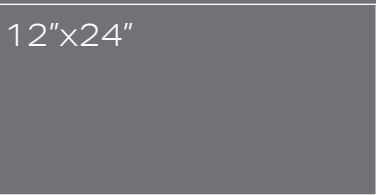

### WEAR LAYER

20 MIL

### THICKNESS

2.5MM

### LEAD TIME + LOCATION

1-2 WEEKS | USA

### EDGE PROFILE

BEVELED


### INSTALLATION

GLUE DOWN

### ENVIRONMENTAL

- RAPIDLY RENEWABLE CONTENT - CONTAINS 2%
- INDOOR AIR QUALITY - FLOORSCORE CERTIFIED; CDPH v1.1-2010
- PRODUCT DECLARATIONS - EPD, HPD
- **LEED SCOREBOARD** - MAY CONTRIBUTE TO LEED CREDITS:
  - LEED 2009: MRc5 REGIONAL MATERIALS; MRc6 RAPIDLY RENEWABLE MATERIALS
  - IEQ4.1 LOW EMITTING ADHESIVES
  - IEQ4.3 LOW EMITTING MATERIALS
  - FLOORING LEED v4: BUILDING PRODUCT DISCLOSURE & OPTIMIZATION EPDs
  - BUILDING PRODUCT DISCLOSURE & OPTIMIZATION - SOURCING RAW MATERIALS
  - BUILDING PRODUCT DISCLOSURE & OPTIMIZATION - MATERIAL INGREDIENTS
  - IEQc2 - LOW EMITTING MATERIALS


VISIT MM ORIGIN WEBSITE, [MINDFULMATERIALS.ORIGIN.BUILD](https://mindfulmaterials.origin.build), FOR CURRENT TRANSPARENCY INFORMATION

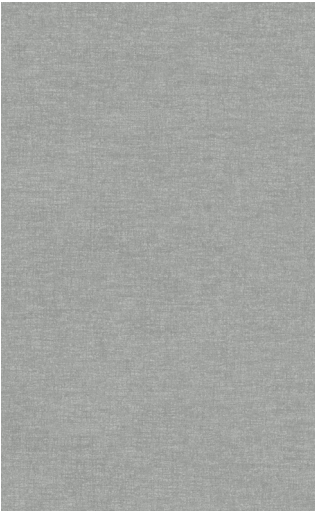

CROSSHATCH  
LIGHT GREY




LINES  
LIGHT GREY

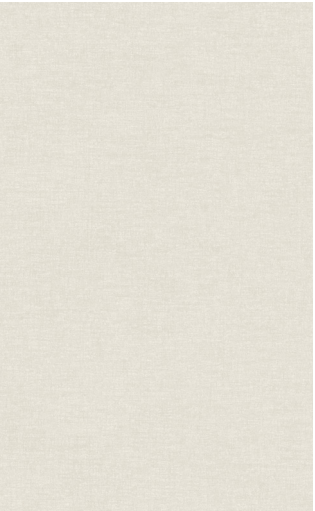

CROSSHATCH  
OFF-WHITE



LINES  
OFF-WHITE

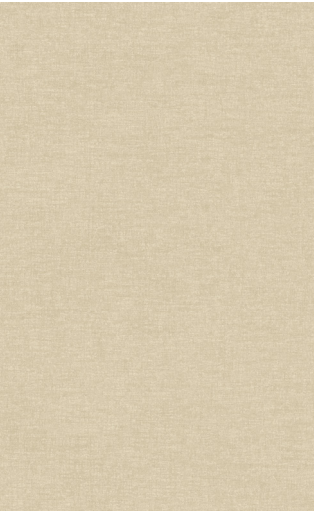

CROSSHATCH  
BEIGE



LINES  
BEIGE




CROSSHATCH  
SAND




LINES  
SAND




CROSSHATCH  
RED

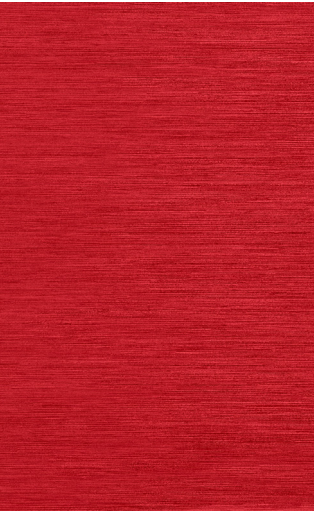


LINES  
RED

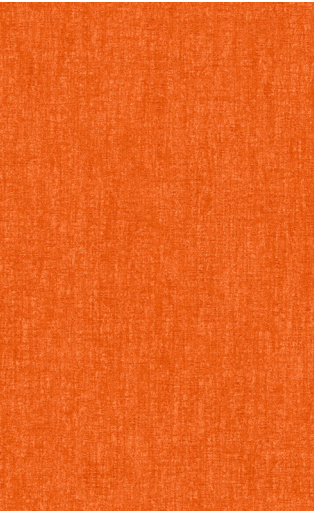

CROSSHATCH  
ORANGE

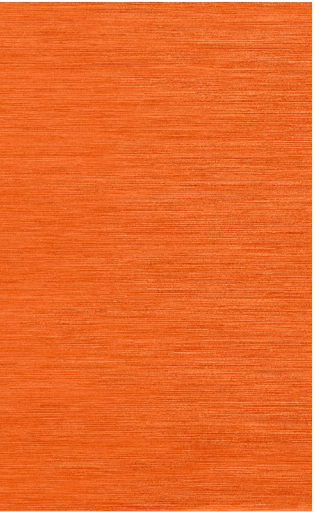

LINES  
ORANGE

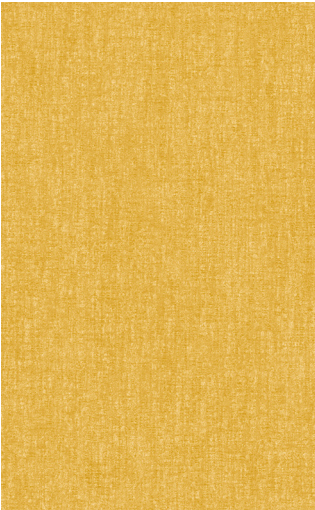

CROSSHATCH  
YELLOW




LINES  
YELLOW




CROSSHATCH  
GREEN



LINES  
GREEN

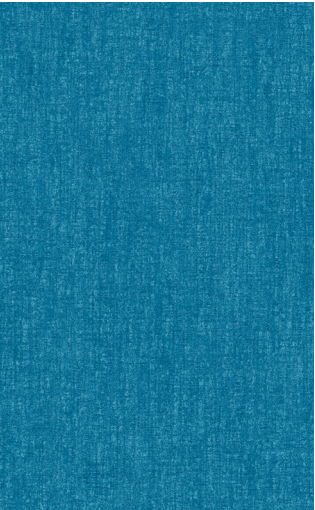

CROSSHATCH  
TEAL

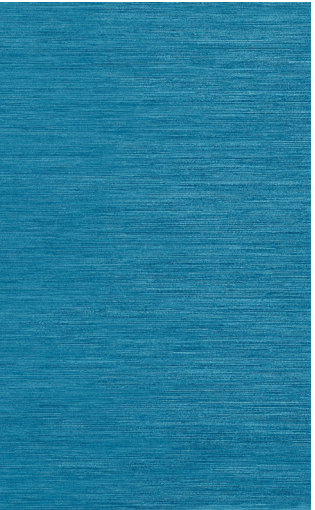

LINES  
TEAL



# HARMONIOUS

## LUXURY VINYL TILE

SPECIFICATION REFERENCE	TEST METHOD	TEST RESULT
STATIC LOAD	ASTM F970	PASSES- 2,000 PSI; RESIDUAL INDENT <0.005"
HEAT RESISTANCE	ASTM F1514	PASSES
LIGHT RESISTANCE	ASTM F1515	PASSES
CHEMICAL RESISTANCE	ASTM F925	PASSES
SMOKE DENSITY	ASTM E662	PASSES <450
RADIANT PANEL	ASTM E648	PASSES, CLASS 1
FLEXIBILITY	ASTM F137	PASSES, 1" MANDREL
DIMENSIONAL STABILITY	ASTM F2199	PASSES, MAX 0.020"/LFT
SQUARENESS	ASTM F540	PASSES - MAX 0.010"
RESIDUAL INDENTATION	ASTM F1914	PASSES - < 8% AVG/10% SINGLE VALUE
FLOORING RADIANT PANEL	ASTM E648 P	PASSES - CLASS 1; > 0.45 WATTS/CM <sup>2</sup>
SLIP RESISTANCE	ASTM C1028	PASSES - >0.5 LEATHER; 0.6 RUBBER
CLASSIFICATION	ASTM F1700	CLASS III, TYPE B

\*\*All technical data was supplied by the manufacturer and is being provided by CMC for informational purposes only. Exact test results should be requested from your CMC contact.



CROSSHATCH  
BLUE



LINES  
BLUE



CROSSHATCH  
DARK BLUE



LINES  
DARK BLUE



CROSSHATCH  
MAROON



LINES  
MAROON



CROSSHATCH  
PURPLE



LINES  
PURPLE



LINES | BLUE, GREY, PURPLE

