



## DESCRIPTION


Fusion LVT flooring invites overlapping geometric patterns and vibrant colors into your design for exciting, unique spaces.

## COLORS

HATCH											
		Blue	Brown	Dark Brown	Grey	Light Brown	Light Grey				
		Magent	Orange	Yellow							
		MOTIF									
				Blue	Brown	Dark Brown	Grey	Light Brown	Light Grey		
				Magent	Orange	Yellow					
				TRIANGLES							
						Blue	Brown	Dark Brown	Grey	Light Brown	Light Grey
Magent	Orange					Yellow					



## AVAILABLE SIZES

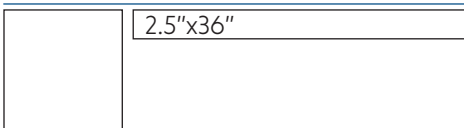

9"x9"

## ATTRIBUTES

Wear Layer Thickness	20 mil
Total Thickness	2.5mm
Edge Profile	Micro-Bevel
Installation	Glue Down
Construction	Luxury Vinyl Tile
Classification	ASTM F1700 Class III, Type B

## ENVIRONMENTAL DATA

**Rapidly Renewable Content** - Contains 2%

**Indoor Air Quality** - FloorScore Certified; CDPH v1.1-2010

**Product Declarations** - EPD, HPD

**LEED Scoreboard** - May contribute to LEED credits:  
LEED 2009: MRc5 Regional Materials; MRc6 Rapidly Renewable Materials; IEQ4.1 Low Emitting Adhesives; IEQ4.3 Low Emitting Materials - Flooring  
LEED v4: Building Product Disclosure & Optimization - EPDs; Building Product Disclosure & Optimization - Sourcing Raw Materials; Building Product Disclosure & Optimization - Material Ingredients; IEQc2 - Low Emitting Materials

Visit mM Origin website, [mindfulmaterials.origin.build](http://mindfulmaterials.origin.build), for current transparency information

Manufactured in USA

## TECHNICAL DATA\*

Specification Reference	Test Method	Test Result
Static Load	ASTM F970	Passes - 2,000 PSI; Residual Indent $\leq 0.005"$
Resistance to Heat	ASTM F1514	Passes
Resistance to Light	ASTM F1515	Passes
Resistance to Chemicals	ASTM F925	Passes
Smoke Density	ASTM E662	Passes - $\leq 450$
Radiant Panel	ASTM E648	Passes, Class I
HUD/FHA	--	Passes
Flexibility	ASTM F137	Passes - 1" Mandrel - No Crack/Break
Dimensional Stability	ASTM F2199	Passes - Max 0.020"/LFT
Squareness	ASTM F540	Passes - Max 0.010"
Residual Indentation	ASTM F1914	Passes - $< 8\%$ Avg/10% Single Value
Flooring Radiant Panel	ASTM E648	Passes - Class 1; $\geq 0.45$ watts/cm <sup>2</sup>
Slip Resistance	ASTM C1028	Passes - $\geq 0.5$ Leather; 0.6 Rubber

\*All technical data was supplied by the manufacturer and is being provided by CMC for informational purposes only. Exact test results should be requested from your CMC contact.

## INSTALLATION METHOD

All arrows in the same direction. Planks should have end joints offset by at least 6" and staggered to create a random appearance. Tiles should be installed block or staggered; when quarter turned, arrows should alternate.