

WOOD RIGID COLLECTION 01

WOOD RIGID COLLECTION 01 IS IDEAL FOR COMMERCIAL FLOORING THANKS TO THE RIGID CORE, WHICH IS TECHNICALLY ADVANCED CONSTRUCTION WHILE MAINTAINING A SOPHISTICATED COLOR RANGE. THE 20MIL WEAR LAYER ENSURES DURABILITY IN HIGH-TRAFFIC FLOORING AREAS, AND THIS PRODUCT FEATURES AN ENHANCED URETHANE WEAR LAYER WHICH INCLUDES ALUMINUM OXIDE.



NATURAL RIFT CUT WALNUT

**creative
materials
corporation**



BLEACHED ELM

WOOD RIGID COLLECTION 01

LUXURY VINYL TILE

SIZES

6"x48"

WEAR LAYER

20 MIL

THICKNESS

6MM

LEAD TIME + LOCATION

1-2 WEEKS DOMESTIC INVENTORY | CHINA

EDGE PROFILE

MICRO-BEVELED

INSTALLATION

FLOATING

ENVIRONMENTAL

- INDOOR AIR QUALITY - FLOORSCORE CERTIFIED; CDPH v1.1-2010
- PRODUCT DECLARATIONS - EPD
- **LEED SCOREBOARD** - MAY CONTRIBUTE TO LEED CREDITS:
 - LEED 2009:
 - IEQ4.1 LOW EMITTING ADHESIVES
 - IEQ4.3 LOW EMITTING MATERIALS
 - FLOORING LEED v4: BUILDING PRODUCT DISCLOSURE & OPTIMIZATION EPDs
 - BUILDING PRODUCT DISCLOSURE & OPTIMIZATION - MATERIAL INGREDIENTS
 - IEQc2 - LOW EMITTING MATERIALS

VISIT MM ORIGIN WEBSITE, MINDFULMATERIALS.ORIGIN.BUILD, FOR CURRENT TRANSPARENCY INFORMATION

WWW.CREATIVEMATERIALSCORP.COM



NATURAL RIFT CUT WALNUT



WARM GREY STAINED OAK



LIGHT GREY STAINED OAK



NATURAL CEDAR



BLEACHED ELM



QUARTERSAWN OAK



LIMING WAXED OAK



SPICE STAINED CHERRY



STAINED RIFT CUT WALNUT



RECLAIMED BARN WOOD


WOOD RIGID COLLECTION 01

LUXURY VINYL TILE


SPECIFICATION REFERENCE	TEST METHOD	TEST RESULT
STATIC LOAD	ASTM F970	PASSES- 2,000 PSI; RESIDUAL INDENT <0.005"
HEAT RESISTANCE	ASTM F1514	PASSES
LIGHT RESISTANCE	ASTM F1515	PASSES
CHEMICAL RESISTANCE	ASTM F925	PASSES
SMOKE DENSITY	ASTM E662	PASSES <450
RADIANT PANEL	ASTM E648	PASSES, CLASS 1
FLEXIBILITY	ASTM F137	PASSES, 1" MANDREL
DIMENSIONAL STABILITY	ASTM F2199	PASSES, MAX 0.020"/LFT
SQUARENESS	ASTM F540	PASSES - MAX 0.010"
RESIDUAL INDENTATION	ASTM F1914	PASSES - < 8% AVG/10% SINGLE VALUE
FLOORING RADIANT PANEL	ASTM E648 P	PASSES - CLASS 1; > 0.45 WATTS/CM ²
CLASSIFICATION	ASTM F1700	CLASS I, TYPE B

**All technical data was supplied by the manufacturer and is being provided by CMC for informational purposes only. Exact test results should be requested from your CMC contact.


PATTERN OPTIONS

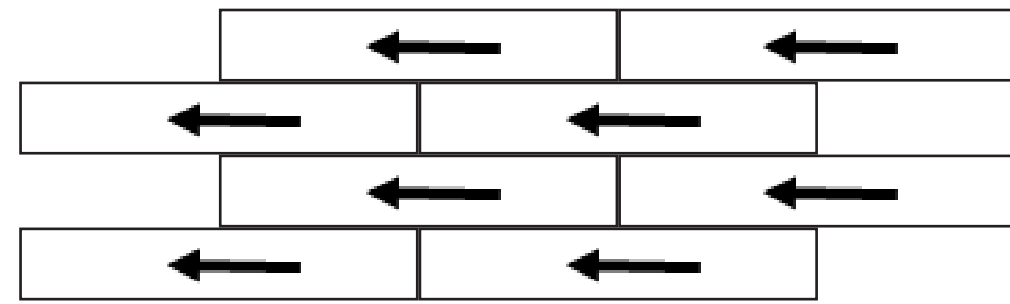


BRICK

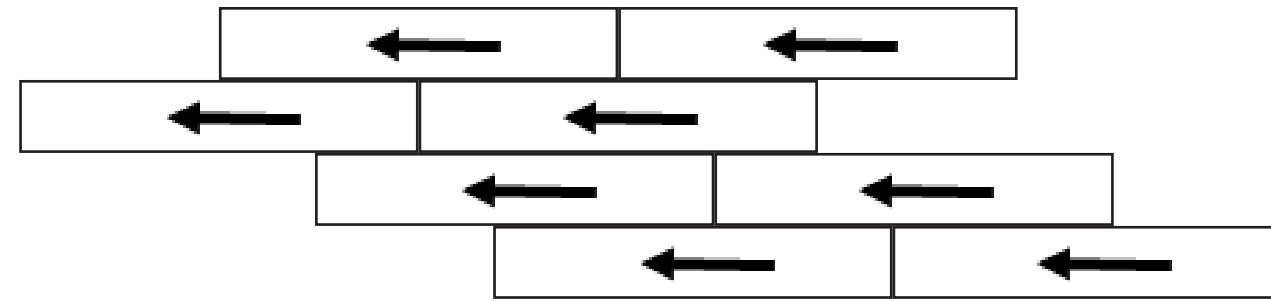

STAGGER

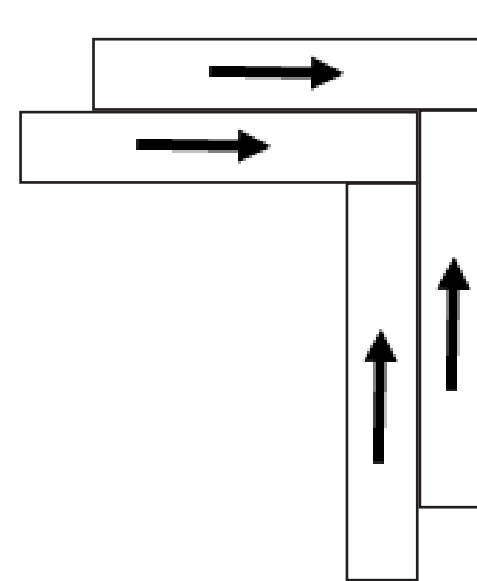

HERRINGBONE

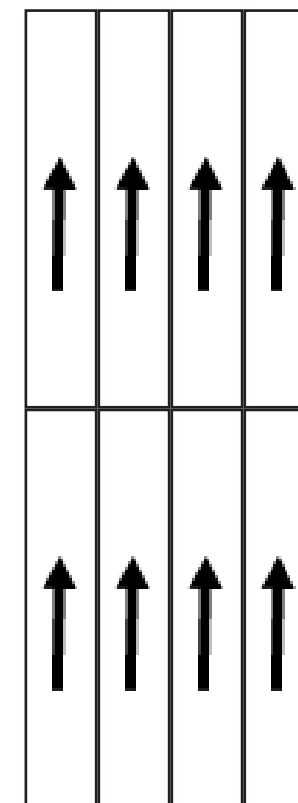

MONOLITHIC

