

GREY

NETWORK LVT FLOORING OFFERS AUNIQUE OVERLAPPING GEOMETRIC PATTERN USING SQUARES AND RECTANGLES. THE BONUS OF AVAILABILITY IN BOTH NEUTRAL AND BRIGHT COLORS SETS THIS LVT FLOORING APART.

NETWORK



NETWORK

LUXURY VINYL TILE

SIZES

12"×24"

WEAR LAYER

20 MIL

THICKNESS

2.5MM

LEAD TIME + LOCATION

2-4 WEEKS | USA

EDGE PROFILE


SQUARE

INSTALLATION

GLUE DOWN


ENVIRONMENTAL

- Environmental Product Declaration (EPD) 3rd party certified in accordance with ISO 14025, EN 15804, and ISO 21930:2017
- FLOORSCORE® CERTIFIED
- MR Credit: Building Product Disclosure and Optimization
- Environmental Product Declarations Option 1
 - Environmental Product Declaration RFCi Industry Average EPD (50%)
- EQ Credit: Low Emitting Materials Option 1
 - PRODUCT CATEGORY CALCULATIONS FLOORSCORE CERTIFIED

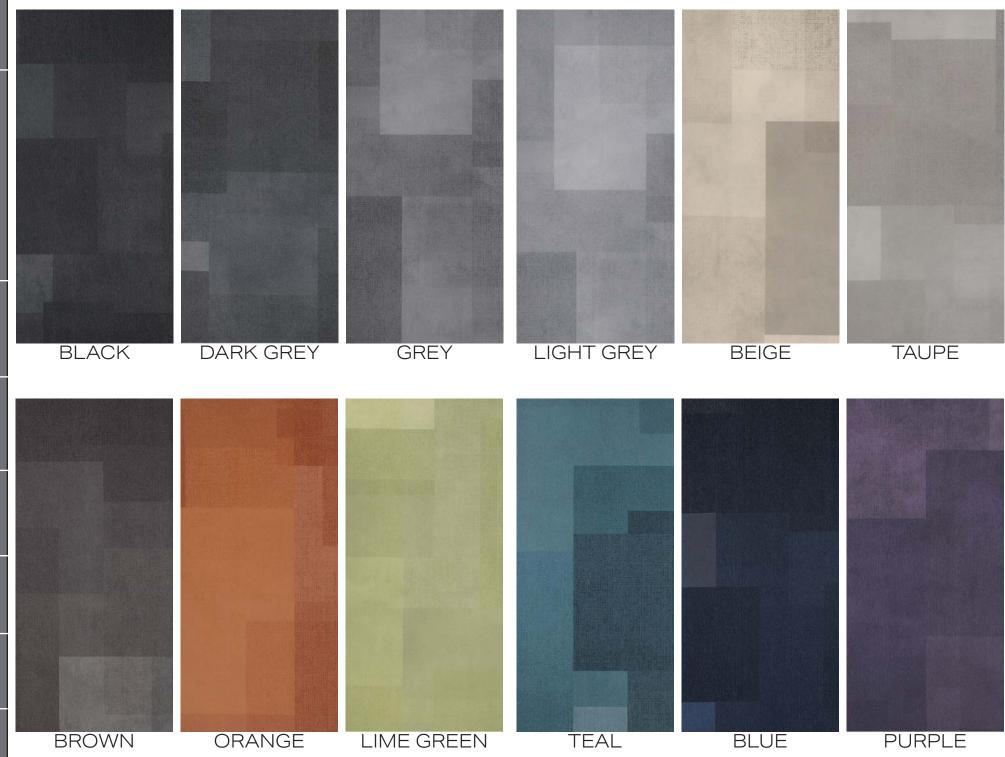









NETWORK


LUXURY VINYL TILE

CHART INDICATES AVAILABLE SIZE + THICKNESS + STYLE. IF GREY BLOCK IS PRESENT, THE PRODUCT IS NOT AVAILABLE IN THAT SIZE.

	BEIGE	TAUPE	LIGHT GREY	LIME GREEN	
12"х24"х2.5мм	OVERLAP	OVERLAP	OVERLAP	OVERLAP	
	TEAL	PURPLE	BLUE	GREY	Γ
12"х24"х2.5мм	OVERLAP	OVERLAP	OVERLAP	OVERLAP	



WWW.CREATIVEMATERIALSCORP.COM

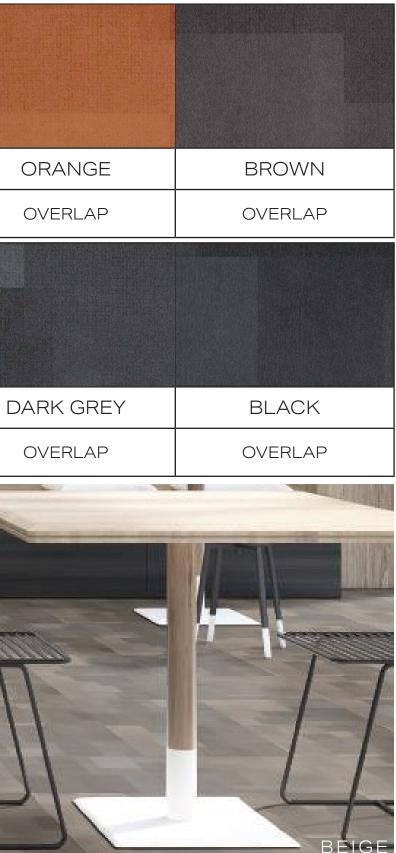

NETWORK

LUXURY VINYL TILE

Specification Reference	Test Method	TEST RESULT
STATIC LOAD	ASTM F970	Passes- (modified) 2,000 PSI
HEAT RESISTANCE	ASTM F1514	PASSES
LIGHT RESISTANCE	ASTM F1515	PASSES
CHEMICAL RESISTANCE	ASTM F925	PASSES
SMOKE DENSITY	ASTM E662	PASSES <450
RADIANT PANEL	ASTM E648	PASSES, class 1
CLASSIFICATION	ASTM F1700	CLASS II, TYPE B

**All technical data was supplied by the manufacturer and is being provided by CMC for informational purposes only. Exact test results should be requested from your CMC contact.

PATTERN OPTIONS

