WOOD RIGID COLLECTION 01



Description

Wood Rigid Collection 01 LVT is ideal for commercial flooring thanks to the rigid core, which is technically advanced construction while maintaining a sophisticated color range. The 20mil wear layer ensures durability in high-traffic flooring areas, and this product features an enhanced urethane wear layer which includes aluminum oxide.

Colors





















Wear Layer & Thickness

20 Mil | 6mm

Lead Time

Location

China

2-4 Weeks Domestic Inventory

Edge Profile

Micro-Beveled

Sizes

7"x48"

Technical Data

Specification Reference	Test Method	Test Result
Static Load	ASTM F970	Passes - 2,000 PSI
Heat Resistance	ASTM F1514	Passes
Light Resistance	ASTM F1515	Passes
Chemical Resistance	ASTM F925	Passes
Smoke Density	ASTM E662	Passes < 450
Radiant Panel	ASTM E648	Passes, Class 1
Flexibility	ASTM F137	Passes, 1" Mandrel
Dimensional Stability	ASTM F2199	Passes, Max 0.020"/lft
Residual Indentation	ASTM F1914	Passes < 8% Avg.
Flooring Radiant Panel	ASTM E648P	Passes, Class 1
Classification	ASTM F1700	Class I, Type B


Body Type	Installation	
Luxury Vinyl Tile (LVT)	Floating	



WOOD RIGID COLLECTION 01



Patterns

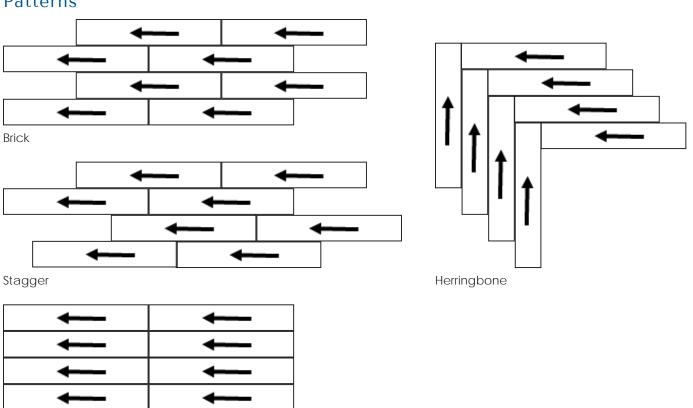

WOOD RIGID COLLECTION 01

Color • Size • Finish Matrix

Color — Size & Thickness					
7" x48" x6mm	Natural Rift Cut Walnut	Warm Grey Stained Oak	Light Grey Stained Oak	Natural Cedar	Bleached Elm
Color — Size & Thickness					
7" x48" x6mm	Quartersawn Oak	Liming Waxed Oak	Spice Stained Cherry	Stained Rift Cut Walnut	Reclaimed Barn Wood



Chart indicates available size, color, finish and thickness options. Shaded block indicates not available. Sizing is nominal for field tile, trims, and decors.

