

CONCRETE COLLECTION 01


creative
materials
corporation



Description

Concrete Collection 01 combines oxidized, striated, brushed, and mottled concrete looks easily in LVT form. As a bonus, it is easy installation and maintenance.

Colors

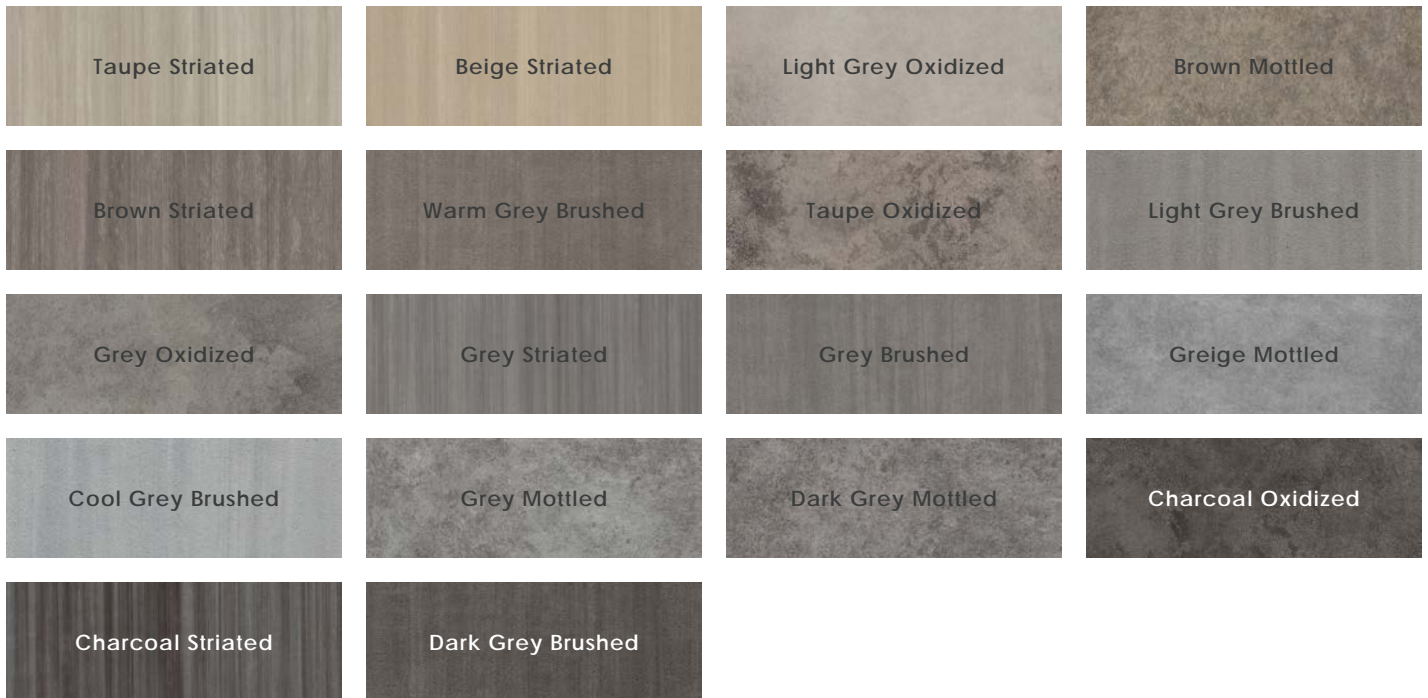



Brown Striated + Taupe Striated




Brown Mottled

Sizes



9"x18"



18"x18"

Wear Layer & Thickness

30 Mil | 2.5mm

Lead Time

2-4 Weeks

Edge Profile

Micro-Beveled

Location

United States

Technical Data

Specification Reference	Test Method	Test Result
Static Load	ASTM F970	Passes - 2,000 PSI
Heat Resistance	ASTM F1514	Passes
Light Resistance	ASTM F1515	Passes
Chemical Resistance	ASTM F925	Passes
Smoke Density	ASTM E662	Passes < 450
Flexibility	ASTM F137	Passes, 1" Mandrel
Dimensional Stability	ASTM F2199	Passes, Max 0.020" /ft
Squareness	ASTM F540	Passes, Max 0.010"
Residual Indentation	ASTM F1914	Passes < 8% Avg.
Flooring Radiant Panel	ASTM E648	Passes, Class 1
Slip Resistance	ASTM C1028	Passes
Classification	ASTM F1700	Class III, Type B

Body Type	Installation
Luxury Vinyl Tile (LVT)	Glue Down

CONCRETE COLLECTION 01

creative
materials
corporation

Color•Size•Finish Matrix

Color — Size & Thickness						
	Taupe Striated	Beige Striated	Light Grey Oxidized	Brown Mottled	Brown Striated	Warm Grey Brushed
9" x 18" x 2.5mm	X	X			X	X
18" x 18" x 2.5mm	X	X	X	X	X	

Color — Size & Thickness						
	Taupe Oxidized	Light Grey Brushed	Grey Oxidized	Grey Striated	Grey Brushed	Greige Mottled
9" x 18" x 2.5mm		X		X	X	
18" x 18" x 2.5mm	X		X	X		X

Color — Size & Thickness						
	Cool Grey Brushed	Grey Mottled	Dark Grey Mottled	Charcoal Oxidized	Charcoal Striated	Dark Grey Brushed
9" x 18" x 2.5mm	X				X	X
18" x 18" x 2.5mm		X	X	X	X	

Chart indicates available size, color, finish and thickness options. Shaded block indicates not available. Sizing is nominal for field tile, trims, and decors.

